

Features

Unregulated Converter

- Single Output Rail
- Industry Standard Pinout
- 1kVDC or 2kVDC Isolation
- High Efficiency for Low Power Applications
- UL94V-0 Package Material
- Optional Continuous Short Circuit Protected
- Fully Encapsulated
- Custom versions available
- Efficiency to 76%

Description

The RM series DC/DC converter has been designed for isolating or converting DC power rails with very light loads. Efficiencies are typically 10% higher than a comparable 0.5W or 1W converters run at the same low load.

Selection Guide

| Part Number SIP 4 | (2kV) | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency (%) | Max. Capacitive Load ⁽¹⁾ |
|----------------------|-------|------------------------|-------------------------|------------------------|-------------------|-------------------------------------|
| RM-xx3.3S | (H) | 3.3, 5, 12, 15, 24 | 3.3 | 76 | 65-70 | 1000µF |
| RM-xx05S | (H) | 3.3, 5, 12, 15, 24 | 5 | 50 | 66-72 | 470µF |
| RM-xx09S | (H) | 3.3, 5, 12, 15, 24 | 9 | 28 | 70-72 | 470µF |
| RM-xx12S | (H) | 3.3, 5, 12, 15, 24 | 12 | 21 | 70-72 | 150µF |
| RM-xx15S | (H) | 3.3, 5, 12, 15, 24 | 15 | 17 | 70-76 | 150µF |

xx = Input Voltage (other input and output voltage combinations and output powers available on request)

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RM-0505S/P, RM-0505S/HP

Specifications (measured at T_A = 25°C, nominal input voltage, full load and after warm-up)

| | | |
|--|---|---|
| Input Voltage Range | | ±10% |
| Output Voltage Accuracy | | ±5% |
| Line Voltage Regulation | | 1.2%/1% of Vin typ. |
| Load Voltage Regulation (10% to 100% full load) | 3.3V output types 5V output type 12V, 15V, 24V output types | 20% max. 15% max. 10% max. |
| Output Ripple and Noise (20MHz limited) | | 50mVp-p max. |
| Operating Frequency | | 50kHz min. / 90kHz typ. / 105kHz max. |
| Efficiency at Full Load | | 65% min. / 75% typ. |
| Minimum Load = 0% | Specifications valid for 10% minimum load only. | |
| Isolation Voltage | (tested for 1 second) (rated for 1 minute) | 1000VDC 500VAC / 60Hz |
| Isolation Voltage | H-Suffix H-Suffix (tested for 1 second) (rated for 1 minute) | 2000VDC 1400VAC / 60Hz |
| Isolation Capacitance | | 25pF min. / 82pF max. |
| Isolation Resistance | | 10 GΩ min. |
| Short Circuit Protection P-Suffix | | 1 Second Continuous |
| Operating Temperature Range (free air convection) | | -40°C to +85°C (see Graph) |
| Storage Temperature Range | | -55°C to +125°C |
| Relative Humidity | | 95% RH |
| Package Weight | RM types RL types | 1.4g 1.8g |
| Packing Quantity | | 42 pcs per Tube |
| MTBF (+25°C) (+85°C) | } Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F 1327 x 10 ³ hours |
| | | using MIL-HDBK 217F 302 x 10 ³ hours |

ECONOLINE

DC/DC-Converter

with 3 year Warranty




0.25 Watt SIP4 Single Output



EN-60950-1 Certified

RM

Derating-Graph (Ambient Temperature)


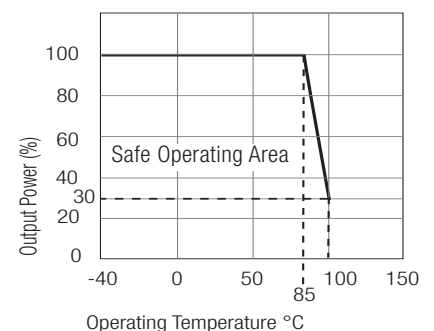


Refer to Application Notes



www.recom-electronic.com

Typical Characteristics



RM-xx05S

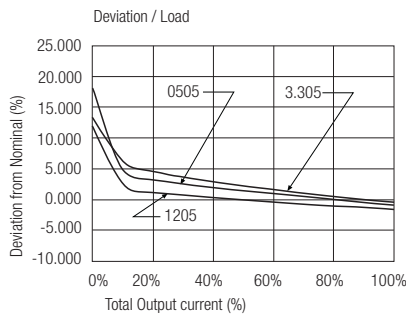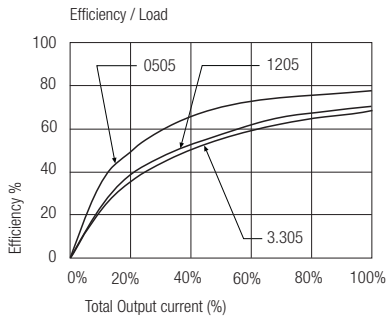

RM-xx12S

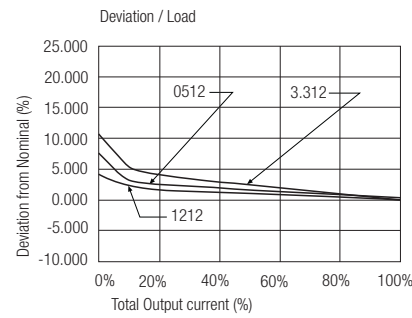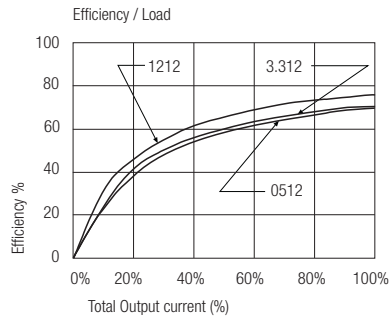

RM-xx15S

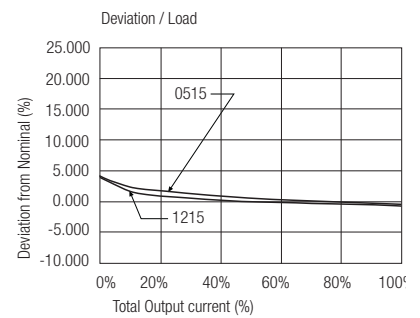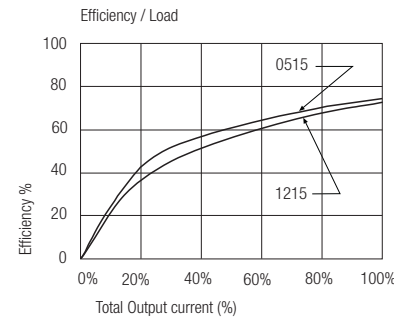

Notes

Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Certifications

EN General Safety




Report: PS080804950C2

EN 60950-1:2004 + A11:2004


RM

Package Style and Pinning (mm)

4 PIN SIP Package



Recommended Footprint Details



RM Pin Connections

| Pin # | Single |
|-------|--------|
| 1 | -Vin |
| 2 | +Vin |
| 3 | -Vout |
| 4 | +Vout |

XX.X ± 0.5 mm
XX.XX ± 0.25 mm